


Paris Large Marquees



Specifications for your chosen product variant

Span width	25.00 m
Eave Height	3.00 m
Ridge height	7.29 m
Roof pitch	18°
Main profile size	210/110/4/5.5 mm

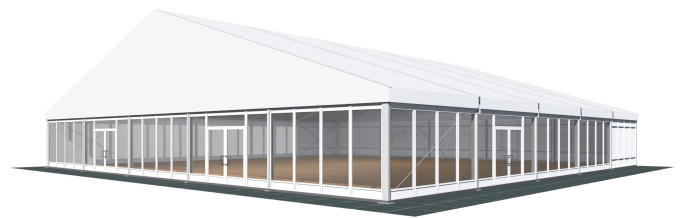

Specifications

Span width	10.00 m - 30.00 m
Eave height	2.45 m - 4.00 m
Ridge height	4.67 m - 9.12 m
Bay distance	5.00 m
Roof pitch	18° - 24°
Minimum length	10.00 m - 30.00 m
Maximum length	Unlimited in 5.00 m increments
Max allowed wind speed	102 km/h (0.50 kN/m ²)
Main profile size	125/75/3 mm - 285/110/5/4 mm
Eave connection type	Internal aluminium insert or aluminium connection with locking pins
Aluminium type	European - Hard Pressed Extruded Structural Aluminium
Connecting components	European - hot dipped, structural grade corrosive resistant galvanised steel
Roof covering type	Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.

Details



Paris Large Marquees are available in widths of 10.00 m, 15.00 m, 20.00 m 25.00 m and 30.00 m. Lengths start at 10.00 m which can be extended indefinitely in 5.00 m bay extensions.

This [Large Marquee](#) is also available with an A-frame roof, curved roof, shaped roof and high peak roof.

Paris Large Marquees



HTS
TENTIQ

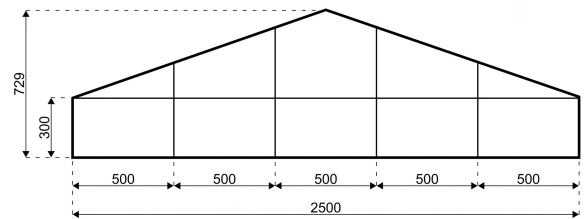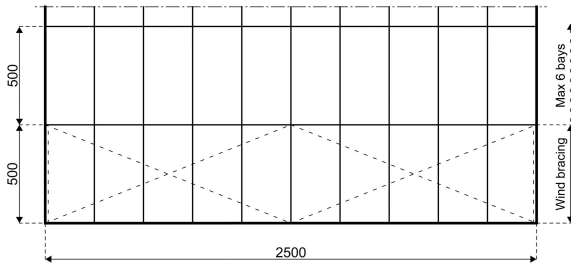

HTS TENTIQ GmbH

Unit 3 Lawrence Way
Camberley, Surrey, GU15 3DL
United Kingdom

T +44 1276 462 600
E salesUK@hts-tentiq.com
www.hts-tentiq.com

HTS TENTIQ disclaims any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet on this website. All products, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.